




**Solid Carbide Drill for
Stainless Steel -
Standard Flute Length**

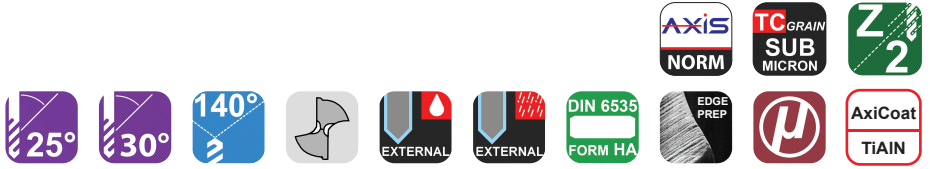

T4881

Dia Tolerance : +0 / -0.01

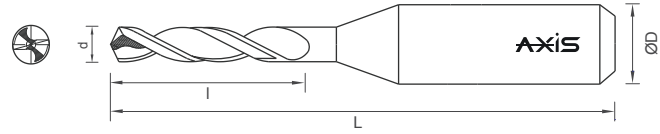

APPLICATION

Suitable for Drilling
Stainless steel and difficult
to machine material like
Inconel and Titanium Alloys

OD relief in dia > ø 0.15mm
Helix Angle 25° for ø <1.00
Helix Angle 30° for ø ≥1.00
Available in step of ø 0.010mm

PACKING


Single tool per pack.

Dia ød	Flute Length l	Total Length L	Shank Dia ØDh6
0.10	1.00	38.00	3.00
0.11	1.10	38.00	3.00
0.12	1.20	38.00	3.00
0.13	1.30	38.00	3.00
0.14	1.40	38.00	3.00
0.15	1.50	38.00	3.00
0.16	1.50	38.00	3.00
0.17	1.50	38.00	3.00
0.18	1.80	38.00	3.00
0.19	1.80	38.00	3.00
0.20	2.00	38.00	3.00
0.21	2.00	38.00	3.00
0.22	2.00	38.00	3.00
0.23	2.30	38.00	3.00
0.24	2.30	38.00	3.00
0.25 - 0.27	2.50	38.00	3.00
0.28	2.80	38.00	3.00
0.29	2.80	38.00	3.00
0.30 - 0.32	3.00	38.00	3.00
0.33	3.30	38.00	3.00
0.34	3.30	38.00	3.00
0.35	3.50	38.00	3.00
0.36	3.50	38.00	3.00
0.37	3.50	38.00	3.00
0.38	3.80	38.00	3.00
0.39	3.80	38.00	3.00
0.40 - 0.44	4.00	38.00	3.00
0.45 - 0.49	4.50	38.00	3.00
0.50 - 0.54	5.00	38.00	3.00
0.55 - 0.59	5.50	38.00	3.00
0.60 - 0.64	6.00	38.00	3.00

SCAN TO WEBSITE



**Solid Carbide Drill for
Stainless Steel -
Standard Flute Length**



T4881

Dia Tolerance : +0 / -0.01

Dia ød	Flute Length l	Total Length L	Shank Dia ØDh6
0.65 - 0.69	6.50	38.00	3.00
0.70 - 0.74	7.00	38.00	3.00
0.75 - 0.79	7.50	38.00	3.00
0.80 - 0.89	8.00	38.00	3.00
0.90 - 0.99	9.00	38.00	3.00
1.00 - 1.59	10.00	38.00	3.00
1.60 - 2.69	12.00	45.00	3.00
2.70 - 3.00	15.00	45.00	3.00

APPLICATION

Suitable for Drilling
Stainless steel and difficult
to machine material like
Inconel and Titanium Alloys

OD relief in dia > ø 0.15mm
Helix Angle 25° for ø <1.00
Helix Angle 30° for ø ≥1.00
Available in step of ø 0.010mm

PACKING

Single tool per pack.

SCAN TO WEBSITE



QUALITY • PRECISION • CONSISTENCY • PEOPLE

www.axis-microtools.com
info@axis-microtools.com

