


**INDMILL G**  
Solid Carbide  
2 Flute Endmill  
Corner Radius  
Diamond Coated

**E1331**

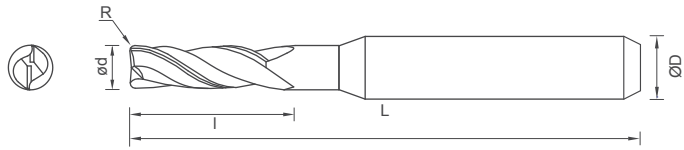

**Dia Tolerance :**  
**+ 0.00 / - 0.015**  
Concentricity : 0.010 max.

**APPLICATION**

Suitable for milling Graphite,  
CFK/GFK, Green stage ceramic /  
Carbides and Non ferrous

**ADVANTAGES**

Higher dimensional accuracy  
Improved process capability  
Extreme wear resistance  
CVD Diamond coating

**PACKING**  
Single tool per pack.

SCAN TO WEBSITE

Dia ød	Corner Radius R ±0.015	EFL l	Total Length L	Shank Dia ØD h5	Stock
2.00	0.50	12.00	50	4.00	
3.00	0.50	12.00	50	4.00	
4.00	0.50	12.00	50	4.00	
5.00	0.50	15.00	50	6.00	
6.00	0.50	18.00	50	6.00	