INDMILLG

Solid Carbide 2 Flute Endmill Corner Radius Diamond Coated

E2161

AXIS Tools for mICRO mACHINING

GRAPHITE | CFK GFK | ZrO_2

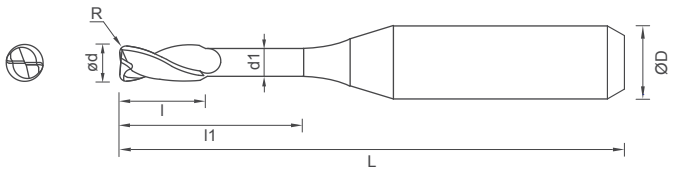

AXIS NORM | TC GRAIN SUB MICRO | DIN 6535 FORM HA | 30° | Z 2 | Diamond Coated

Dia Tolerance :
+ 0.00 / - 0.015
Concentricity : 0.010 max.



APPLICATION

Suitable for milling Graphite, CFK/GFK, Green stage ceramic / Carbides and Non ferrous

ADVANTAGES

Higher dimensional accuracy

Improved process capability

Extreme wear resistance
CVD Diamond coating

PACKING

Single tool per pack.

SCAN TO WEBSITE

Dia ød	Corner Radius R ±0.007	EFL l	Approach Length l1	Neck Dia d1	Total Length L	Shank Dia ØD h5	Stock
0.80	0.08	1.00	4.00	0.75	55	3.00	
1.00	0.10	1.00	5.00	0.90	55	3.00	
1.00	0.10	1.00	10.00	0.90	55	3.00	
1.00	0.10	1.00	15.00	0.90	55	3.00	
1.50	0.15	2.00	10.00	1.40	55	3.00	
1.50	0.15	2.00	15.00	1.40	55	3.00	
2.00	0.20	2.00	10.00	1.90	65	3.00	
2.00	0.20	2.00	15.00	1.90	65	3.00	
2.00	0.20	2.00	25.00	1.90	65	3.00	
2.00	0.50	2.00	15.00	1.90	65	3.00	
3.00	0.30	3.00	25.00	2.90	75	4.00	
3.00	0.50	3.00	30.00	2.90	75	4.00	
6.00	0.50	6.00	40.00	5.90	90	6.00	