




Parallel Shank Drills Jobber Series T832

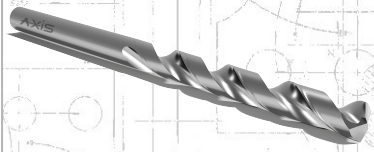

A universal drill rendered with self centering & keen cutting abilities for use across different materials and applications

Made from ultra fine grade carbide with a balanced mix of high toughness and excellent hardness

MMP Superfinishing process to ensure better coating adhesion, better chip evacuation and reduced friction of the chips

Dimensions as per DIN 338

Ein universeller Bohrer mit Selbstzentrierung und hervorragenden Schneideigenschaften für den Einsatz bei verschiedenen Materialien und Anwendungen

Hergestellt aus ultrafeinem Hartmetall mit einer ausgewogenen Kombination aus hoher Zähigkeit und sehr hoher Härte

MMP-Superfinishing-Verfahren zur Gewährleistung einer verbesserten Schichthftung und optimaler Spanabfuhr dank geringerer Reibung der polierten Flächen.

Abmessungen gemäß DIN 338

World of mICRO Tools



www.axis-microtools.com

ød	l	L
0.50	6.00	22.00
0.55	7.00	24.00
0.60	8.00	26.00
0.65		
0.70	9.00	28.00
0.75		
0.80	10.00	30.00
0.85		
0.90	11.00	32.00
0.95		
1.00	12.00	34.00
1.05		
1.10	14.00	36.00
1.15		
1.20	16.00	38.00
1.25		
1.30	18.00	40.00
1.35		
1.40	20.00	43.00
1.45		
1.50	22.00	46.00
1.55		
1.60	24.00	49.00
1.65		
1.70	27.00	53.00
1.75		
1.80	30.00	57.00
1.85		
1.90	33.00	61.00
1.95		
2.00	36.00	65.00
2.05		
2.10	33.00	61.00
2.15		
2.20	36.00	65.00
2.25		
2.30	33.00	61.00
2.35		
2.40	36.00	65.00
2.45		
2.50	33.00	61.00
2.55		
2.60	36.00	65.00
2.65		
2.70	33.00	61.00
2.75		
2.80	36.00	65.00
2.85		
2.90	33.00	61.00
2.95		
3.00	36.00	65.00
3.05		

T832

ød	I	L
3.10	36.00	65.00
3.15		
3.20		
3.25		
3.30		
3.35		
3.40	39.00	70.00
3.45		
3.50		
3.55		
3.60		
3.65		
3.70		
3.75		
3.80	43.00	75.00
3.85		
3.90		
3.95		
4.00		
4.05		
4.10		
4.15		
4.20		
4.25		
4.30		
4.35		
4.40		
4.45		
4.50		
4.55		
4.60		
4.65		
4.70		
4.75		
4.80	52.00	86.00
4.85		
4.90		
4.95		
5.00		
5.05		
5.10		
5.15		
5.20		
5.25		
5.30	57.00	93.00
5.35		
5.40		
5.45		
5.50		
5.55		
5.60		
5.65		
5.70		
5.75		
5.80		
5.85		
5.90		
5.95		
6.00		
6.10	63.00	101.0
6.20		
6.30		
6.40		
6.50		

ød	I	L
6.60	63.00	101.0
6.70		
6.80	69.00	109.0
6.90		
7.00		
7.10		
7.20		
7.30		
7.40		
7.50	75.00	117.0
7.60		
7.70		
7.80		
7.90		
8.00		
8.10		
8.20		
8.30		
8.40		
8.50	81.00	125.0
8.60		
8.70		
8.80		
8.90		
9.00		
9.10		
9.20		
9.30		
9.40	87.00	133.0
9.50		
9.60		
9.70		
9.80		
9.90		
10.00		
10.10		
10.20		
10.30		
10.40	94.00	142.0
10.50		
10.60		
10.70		
10.80		
10.90		
11.00		
11.10		
11.20		
11.30		
11.40		
11.50		
11.60		
11.70		
11.80		
11.90	101.0	151.0
12.00		
12.50		
13.00		
13.50	108.0	160.0
14.00		
14.50	114.0	169.0
15.00		
15.50	120.0	178.0
16.00		