


2 Flute End Mill Corner Radius Diamond Coated




E215-SN

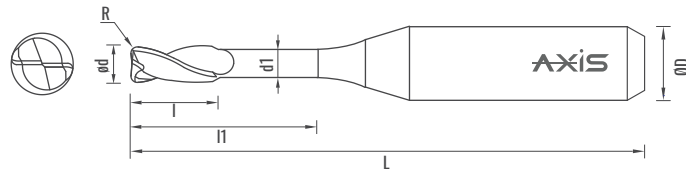

Dia Tolerance :
+ 0.00 / - 0.010 for $\varnothing < 6.00$
+ 0.00 / - 0.015 for $\varnothing \geq 6.00$

Concentricity :
 $0.003 \leq \varnothing 6.00, L \leq 60.00$
 $0.005 > \varnothing 6.00$



APPLICATION

Suitable for milling Graphite,
CFK/GFK, Green stage ceramic /
Carbides and Non ferrous

ADVANTAGES

Higher dimensional accuracy

Improved process capability

Extreme wear resistance
CVD Diamond Coating

Assured quality control

PACKING

Single tool per pack

ON REQUEST

Special Sizes / Inch Sizes

ød	R ±0.003	l	l1	d1	L	ØD h5
0.10	0.01	0.15	0.2	0.08	60	4.00
0.10	0.01	0.15	0.4	0.08	60	4.00
0.15	0.01	0.2	0.3	0.13	60	4.00
0.15	0.01	0.2	0.6	0.13	60	4.00
0.20	0.02	0.3	0.6	0.17	60	4.00
0.20	0.02	0.3	1.0	0.17	60	4.00
0.20	0.02	0.3	1.5	0.17	60	4.00
0.30	0.02	0.5	0.5	0.25	60	4.00
0.30	0.02	0.5	1.0	0.25	60	4.00
0.30	0.02	0.5	1.5	0.25	60	4.00
0.30	0.02	0.5	3.0	0.25	60	4.00
0.30	0.02	0.5	4.5	0.25	60	4.00
0.30	0.02	0.5	6.0	0.25	60	4.00
0.40	0.02	0.6	2.0	0.34	60	4.00
0.40	0.02	0.6	4.0	0.34	60	4.00
0.40	0.02	0.6	6.0	0.34	60	4.00
0.40	0.02	0.6	8.0	0.34	60	4.00
0.50	0.05	0.7	2.5	0.44	60	4.00
0.50	0.05	0.7	3.5	0.44	60	4.00
0.50	0.05	0.7	7.5	0.44	60	4.00
0.50	0.05	0.7	10.0	0.44	60	4.00
0.60	0.05	1.0	3.0	0.54	60	4.00
0.60	0.05	1.0	6.0	0.54	60	4.00
0.60	0.05	1.0	9.0	0.54	60	4.00
0.60	0.05	1.0	12.0	0.54	60	4.00
0.80	0.05	1.2	4.0	0.74	60	4.00
0.80	0.05	1.2	8.0	0.74	60	4.00
0.80	0.05	1.2	12.0	0.74	60	4.00
0.80	0.05	1.2	16.0	0.74	60	4.00
1.00	0.05	1.6	5.0	0.94	60	4.00
1.00	0.05	1.6	10.0	0.94	60	4.00
1.00	0.05	1.6	15.0	0.94	60	4.00
1.00	0.05	1.6	20.0	0.94	60	4.00

ød	R ±0.003	l	l1	d1	L	ØD h5
1.00	0.10	1.6	5.0	0.94	60	4.00
1.00	0.10	1.6	10.0	0.94	60	4.00
1.00	0.10	1.6	15.0	0.94	60	4.00
1.00	0.10	1.6	20.0	0.94	60	4.00
1.50	0.05	2.4	5.0	1.40	60	4.00
1.50	0.05	2.4	10.0	1.40	60	4.00
1.50	0.05	2.4	15.0	1.40	60	4.00
1.50	0.05	2.4	20.0	1.40	60	4.00
1.50	0.15	2.4	5.0	1.40	60	4.00
1.50	0.15	2.4	10.0	1.40	60	4.00
1.50	0.15	2.4	15.0	1.40	60	4.00
1.50	0.15	2.4	20.0	1.40	60	4.00
2.00	0.05	3.0	6.0	1.90	60	4.00
2.00	0.05	3.0	12.0	1.90	60	4.00
2.00	0.05	3.0	18.0	1.90	60	4.00
2.00	0.05	3.0	24.0	1.90	60	4.00
2.00	0.05	3.0	30.0	1.90	60	4.00
2.00	0.15	3.0	20.0	1.90	60	4.00
2.00	0.30	3.0	6.0	1.90	60	4.00
2.00	0.30	3.0	12.0	1.90	60	4.00
2.00	0.30	3.0	18.0	1.90	60	4.00
2.00	0.30	3.0	24.0	1.90	60	4.00
2.00	0.30	3.0	30.0	1.90	60	4.00
3.00	0.05	3.5	9.0	2.80	60	6.00
3.00	0.05	3.5	18.0	2.80	60	6.00
3.00	0.05	3.5	30.0	2.80	60	6.00
3.00	0.05	3.5	45.0	2.80	100	6.00
3.00	0.30	3.5	9.0	2.80	60	6.00
3.00	0.30	3.5	18.0	2.80	60	6.00
3.00	0.30	3.5	30.0	2.80	60	6.00
3.00	0.30	3.5	45.0	2.80	100	6.00
3.00	0.50	3.0	8.0	2.90	60	6.00
4.00	0.05	4.0	12.0	3.80	60	6.00
4.00	0.05	4.0	24.0	3.80	60	6.00
4.00	0.05	4.0	40.0	3.80	100	6.00
4.00	0.50	4.0	12.0	3.80	60	6.00
4.00	0.50	4.0	24.0	3.80	60	6.00
4.00	0.50	4.0	40.0	3.80	100	6.00
5.00	0.05	5.0	15.0	4.80	60	6.00
5.00	0.05	5.0	30.0	4.80	60	6.00
5.00	0.05	5.0	50.0	4.80	100	6.00
5.00	0.50	5.0	15.0	4.80	60	6.00
5.00	0.50	5.0	30.0	4.80	60	6.00
5.00	0.50	5.0	50.0	4.80	100	6.00
6.00	0.05	6.0	18.0	5.80	60	6.00
6.00	0.05	6.0	30.0	5.80	60	6.00
6.00	0.05	6.0	60.0	5.80	100	6.00
6.00	0.50	6.0	18.0	5.80	60	6.00
6.00	0.50	6.0	30.0	5.80	60	6.00
6.00	0.50	6.0	45.0	5.80	100	6.00
6.00	0.50	6.0	60.0	5.80	100	6.00