



Parallel Shank Drills Jobber Series T832-SN



ød >1.50mm

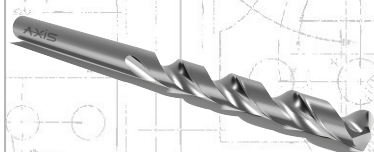

A universal drill rendered with self centering & keen cutting abilities for use across different materials and applications.

Made from ultra fine grade carbide with a balanced mix of optimised toughness and hardness.

MMP Superfinishing process to ensure better coating adhesion, better chip evacuation and reduced friction of the chips.

Dimensions as per DIN 338.



Ein universeller Bohrer mit Selbstzentrierung und hervorragenden Schneideigenschaften für den Einsatz bei verschiedenen Materialien und Anwendungen.

Hergestellt aus ultrafeinem Hartmetall mit einer ausgewogenen Mischung aus optimierter Zähigkeit und Härte.

MMP-Superfinishing-Verfahren zur Gewährleistung einer verbesserten Schichthaftung und optimaler Spanabfuhr dank geringerer Reibung der polierten Flächen.

Abmessungen gemäß DIN 338.

World of mICRO Tools



www.axis-microtools.com

ød	l	L	Stock	
			Uncoated	Coated
0.50	6.0	22	●	○
0.55	7.0	24	○	○
0.60	8.0	26	○	○
0.65			○	○
0.70			○	○
0.75	9.0	28	○	○
0.80	10.0	30	○	○
0.85			○	○
0.90			○	○
0.95	11.0	32	○	○
1.00	12.0	34	●	○
1.05			○	○
1.10			○	○
1.15	14.0	36	○	○
1.20	16.0	38	○	○
1.25			○	○
1.30			○	○
1.35	18.0	40	○	○
1.40			○	○
1.45			○	○
1.50	20.0	43	●	○
1.55			○	○
1.60			○	○
1.65	22.0	46	○	○
1.70			○	○
1.75			○	○
1.80	24.0	49	○	○
1.85			○	○
1.90			○	○
1.95	27.0	53	○	○
2.00			○	○
2.05			○	○
2.10	30.0	57	○	○
2.15			○	○
2.20			○	○
2.25	33.0	61	○	○
2.30			○	○
2.35			○	○
2.40	36.0	65	○	○
2.45			○	○
2.50			○	○
2.55	39.0	69	○	○
2.60			○	○
2.65			○	○
2.70	42.0	73	○	○
2.75			○	○
2.80			○	○
2.85	45.0	77	○	○
2.90			○	○
2.95			○	○
3.00	48.0	81	○	○
3.05			○	○

T832-SN

ød	l	L	Stock	
			Uncoated	Coated
3.10	36.0	65	○	○
3.15			○	○
3.20			○	○
3.25			○	○
3.30			○	○
3.35			○	○
3.40	39.0	70	○	○
3.45			○	○
3.50			●	○
3.55			○	○
3.60			○	○
3.65			○	○
3.70			○	○
3.75			○	○
3.80	43.0	75	○	○
3.85			○	○
3.90			○	○
3.95			○	○
4.00			●	○
4.05			○	○
4.10			○	○
4.15			○	○
4.20			○	○
4.25			○	○
4.30	47.0	80	○	○
4.35			○	○
4.40			○	○
4.45			○	○
4.50			●	○
4.55			○	○
4.60			○	○
4.65			○	○
4.70			○	○
4.75			○	○
4.80	52.0	86	○	○
4.85			○	○
4.90			○	○
4.95			○	○
5.00			●	○
5.05			○	○
5.10			○	○
5.15			○	○
5.20			○	○
5.25			○	○
5.30			○	○
5.35	57.0	93	○	○
5.40			○	○
5.45			○	○
5.50			●	○
5.55			○	○
5.60			○	○
5.65			○	○
5.70			○	○
5.75			○	○
5.80			○	○
5.85			○	○
5.90			○	○
5.95			○	○
6.00			●	○
6.10	63.0	101	○	○
6.20			○	○
6.30			○	○
6.40			○	○
6.50			●	○

ød	l	L	Stock	
			Uncoated	Coated
6.60	63.0	101	○	○
6.70			○	○
6.80	69.0	109	○	○
6.90			○	○
7.00			●	○
7.10			○	○
7.20			○	○
7.30			○	○
7.40			○	○
7.50			●	○
7.60	75.0	117	○	○
7.70			○	○
7.80			○	○
7.90			○	○
8.00			●	○
8.10			○	○
8.20			○	○
8.30			○	○
8.40			○	○
8.50			●	○
8.60	81.0	125	○	○
8.70			○	○
8.80			○	○
8.90			○	○
9.00			●	○
9.10			○	○
9.20			○	○
9.30			○	○
9.40			○	○
9.50			●	○
9.60	87.0	133	○	○
9.70			○	○
9.80			○	○
9.90			○	○
10.00			●	○
10.10			○	○
10.20			○	○
10.30			○	○
10.40			○	○
10.50			●	○
10.60			○	○
10.70	94.0	142	○	○
10.80			○	○
10.90			○	○
11.00			●	○
11.10			○	○
11.20			○	○
11.30			○	○
11.40			○	○
11.50			●	○
11.60			○	○
11.70			○	○
11.80			○	○
11.90	101.0	151	○	○
12.00			●	○
12.50			●	○
13.00			●	○
13.50	108.0	160	●	○
14.00			●	○
14.50	114.0	169	●	○
15.00			●	○
15.50	120.0	178	●	○
16.00			●	○

In Stock ● Not in Stock ○